




GRIPPLE WIRE FENCE SOLUTIONS

SPECIFICATION SHEET

As market leader in the joining and tensioning of wire, Gripple is renowned for providing innovative, cost effective solutions for fencing applications. Gripple fencing products replace traditional methods, generating time and labour savings. our range of products work with a wide variety of mild and high tensile fencing wires across all types of fencing.

- **Tension**
- **Repair**
- **Post Termination**
- **Brace**

GRIPPLE®

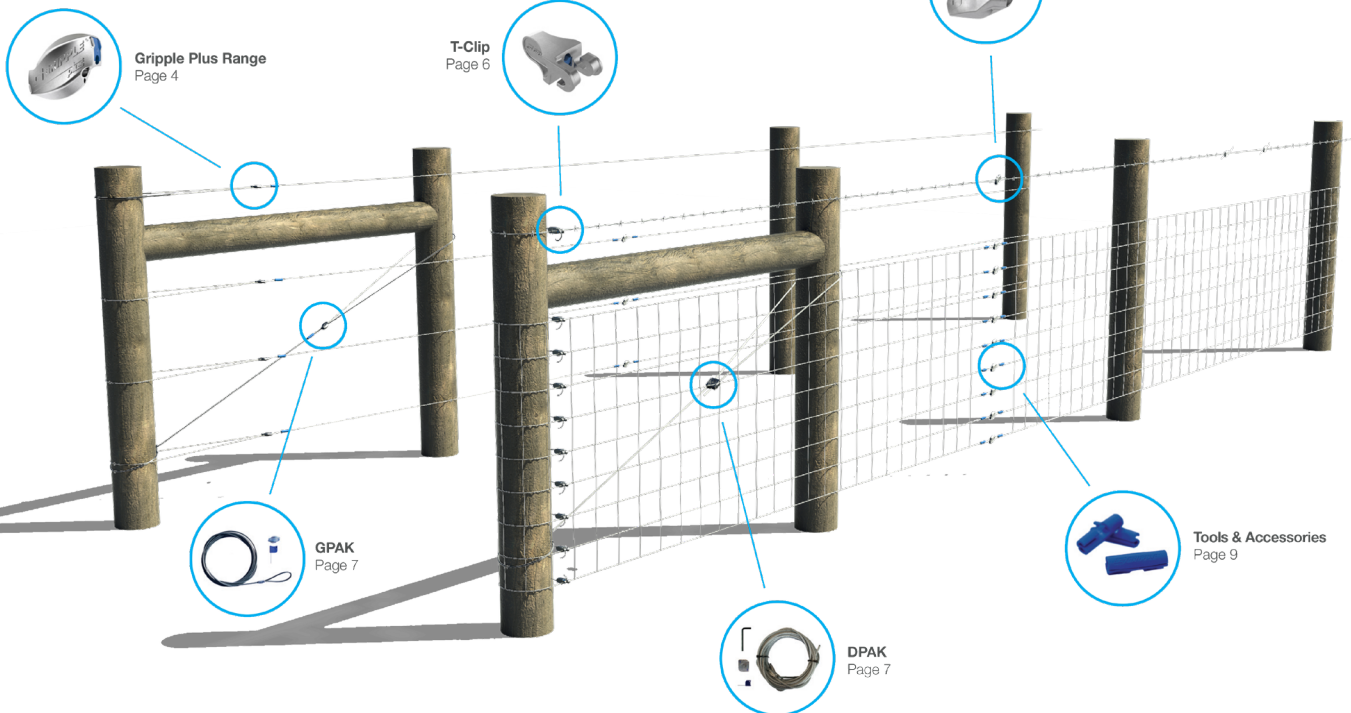



Gripple Plus Range

The Gripple plus range of wire joiners and tensioners is suitable for all fencing applications.

- Join and tension in one
- Eliminate tying and knotting wires, reducing installation time
- Ideal for use on high tensile and mild steel wire
- Designed for high load holding and corrosion resistance
- Easily re-tensioned year-after-year



Gripple Plus Medium - Stock fence repair



Gripple Plus Medium - Loop format and post termination

PRODUCT	WIRE TYPE	WIRE RANGE	STANDARD WIRE GAUGE	MAXIMUM WORKING LOAD
Gripple Plus Small	Plain, Field, Electric	1.40mm - 2.20mm	17SWG - 14SWG	300kg
Gripple Plus Medium	Plain, Field, Electric	2.00mm - 3.25mm	14SWG - 10SWG	400kg
Gripple Plus Large	Plain, Field, Electric	3.25mm - 4.20mm	10SWG - 7½ SWG	600kg



T-Clip

The Gripple T-Clip securely fastens fencing wire at an end post. Easily installed without the need to tie or knot wire.

- Eliminate tying and knotting wires, reducing installation time
- No need to cut and remove vertical wire
- The twist on action provides a secure termination
- High grade ceramic roller for corrosion resistance
- Two sizes available for both stock fencing or barbed wire applications



T-Clip 1 - installed on a stock fence



T-Clip 2 - Used to terminate barbed wire

PRODUCT	WIRE TYPE	WIRE RANGE	STANDARD WIRE GAUGE
T-Clip 1	Plain wire	1.80mm - 3.25mm	15SWG - 10SWG
	High Tensile Barbed	2 x 1.60mm - 2 x 1.70mm	2 x 15½ SWG
T-Clip 2	Plain, Field, Electric	3.25mm - 4.20mm	10SWG - 7½ SWG
	Mild Steel barbed	2 x 1.80mm - 2 x 2.50mm	2 x 15SWG - 2 x 12½ SWG

Load dependent on accompanying Gripple plus or Barbed tensioner. Never tension T-Clip directly

Standard T-Clip: A1525
T-Clip 2: A1527



Barbed

The Gripple Barbed takes the hassle out of joining and knotting barbed wire creating a secure installation

- Eliminates tying and knotting wires, reducing installation time
- Join and tension in one
- Easily re-tensioned year-after-year
- Ideal for use on high tensile and mild steel wire
- High grade ceramic roller for corrosion resistance



Gripple Plus Medium - Stock fence repair



Gripple Plus Medium - Loop format and post termination

PRODUCT	WIRE TYPE	WIRE RANGE	STANDARD WIRE GAUGE	MAXIMUM WORKING LOAD
Barbed	Mild Steel barbed	2 x 2.00mm - 2 x 2.50mm	2 x 14SWG - 2 x 12½ SWG	150kg



GPAK & DPAK

The Gripple Plus Anchor Kit (GPAK) and Dynamic Post Anchor Kit (DPAK) are supplies as ready-to-use kits comprising a pre-cut, fused length of wire rope and a Gripple tensioner.

- Suitable for wooden and metal post bracing
- High load capacity
- Easily re-tensioned year-after-year
- Manufactured with zinc aluminium wire rope for corrosion resistance
- Consistent, professional finish



DPAK 6 - Installed as a H-Post brace



GPAK 3 - Bracing the end of a fencing run

PRODUCT	WIRE TYPE	WIRE RANGE	STANDARD WIRE GAUGE
GPAK Classic 3	3.00mm	4.5m	400kg
GPAK Classic 4	4.00mm	5.0m	600kg
DPAK 4	4.00mm	5.0m	750kg
DPAK 6	6.00mm	4.0m	1750kg

GPAK 3: A1565
GPAK 4: A1570




Find your wire solution

Use our guide to match your wire with the correct Gripple product.

WIRE TYPE	WIRE RANGE	GRIPPLE PLUS SMALL	GRIPPLE PLUS MEDIUM	GRIPPLE PLUS LARGE	GRIPPLE BARBED	GPAK 3	GPAK 4	DPAK 4	DPAK 6	T-CLIP 1*	T-CLIP 2*	MAX WORKING LOAD
Plain wire / Field fence (pre-fab) / Electric fence	1.40mm - 1.80mm 17SWG - 15SWG	✓										300kg
	1.80mm - 2.20mm 15SWG - 14SWG	✓								✓		300kg
	2.00mm - 3.25mm 14SWG - 10SWG		✓							✓		400kg
	3.25mm - 4.20mm 10SWG - 7½SWG			✓							✓	600kg
Mild Steel Barbed	2 x 2.00mm - 2 x 2.50mm 2 x 14SWG - 2 x 12½ SWG				✓						✓	150kg
Bracing	3.00mm x 4.5m					✓						400kg
	4.00mm x 5.0m						✓					600kg
	4.00mm x 4.0m							✓				750kg
	6.00mm x 4.0m								✓			1750kg

Technical Advice & Installation


Gripple Plus range and Barbed - Installation (featuring Setting Key adjustment)

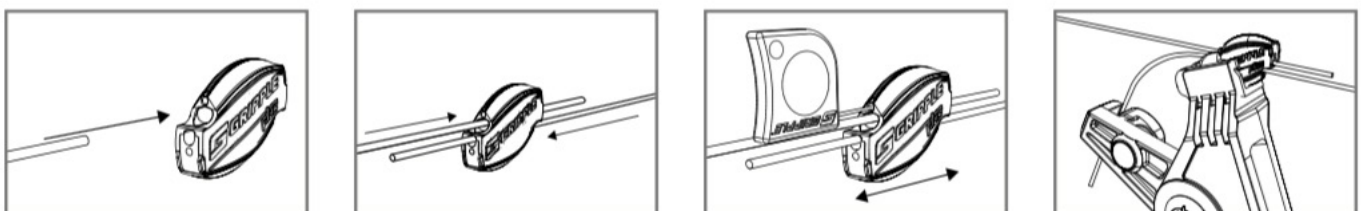

- Apply and re-tension with a tensioning tool (leave at least 75mm tail wire)
- Reposition before applying tension using a Setting Key




Gripple Plus range - Join and tension stock fence

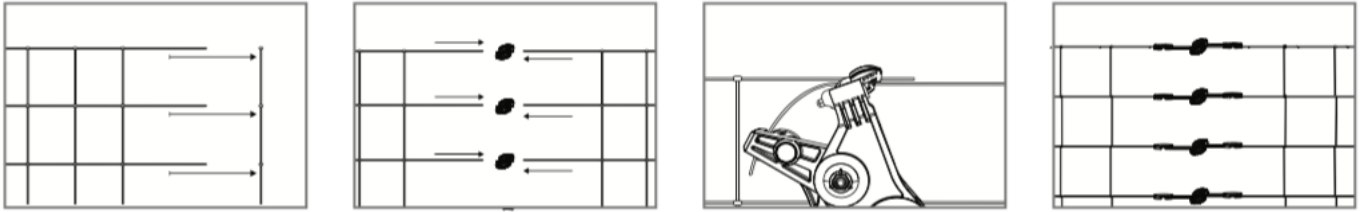


- Remove sufficient verticals prior to installation
- Apply and re-apply tension with a tensioning tool
- Trim excess wire with Wire Cutters, leaving a tail the size of the width of your hand to enable re-tensioning

T-Clip - Installation

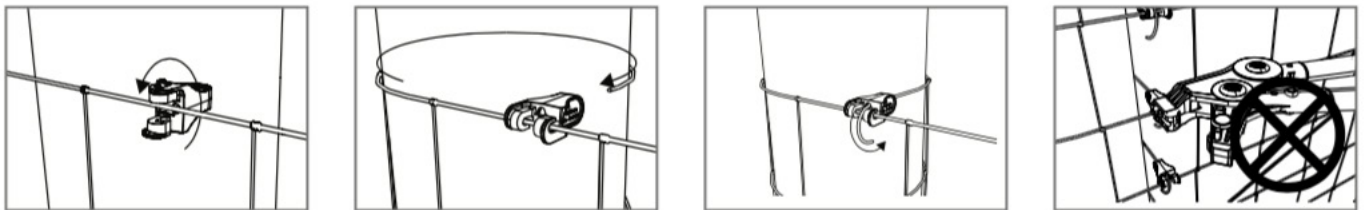


- On field fence, install the T-Clip as close to the end post as possible, inside the closest vertical
- Hand fasten T-Clip, never tension directly with tensioning tool
- To make the installation easier nearer the ground, install T-Clip upside down and bend wire upwards

GPAK / DPAK - Installation

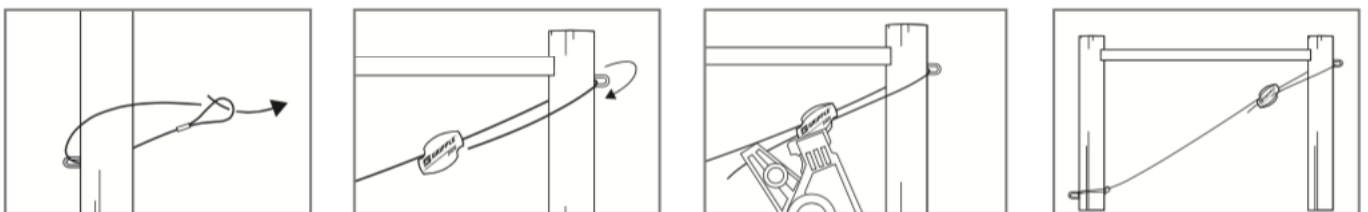

Best Practise

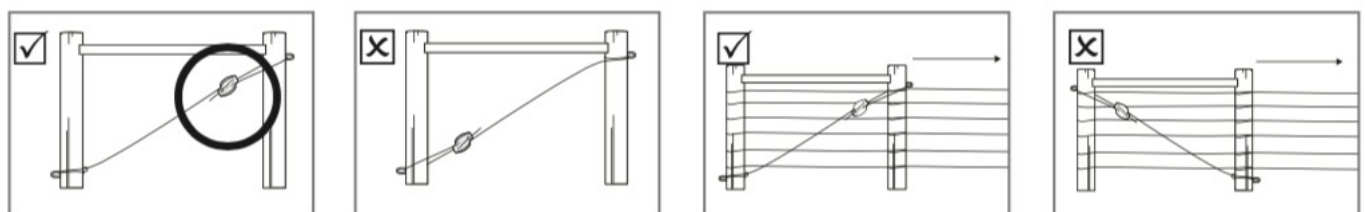

- Always 'choke' the wire tope tightly against the bottom of the post to avoid animals getting caught up in the fence.
- Coupling a GPAK with an anchor will secure your fence, where space is limited